

# 6 POINT STAR

—  SCREWS —



OPTIMISED TORQUE – RELIABLE CONNECTION

---

# 6 POINT STAR




OBE is able to produce its whole screw product programme of plus-minus screws now also according to EN ISO 10664 -Hexalobular internal driving feature system in **T3**.

These screws are characterised by a special screw head shaped inside like a star. The suitable screwdriver and different bits can be provided by OBE.

## Benefits of 6 point star screws

- No slipping out of the screw with the driver when the torque level is reached
- The new drive allows a higher torque compared to Minus or Plus-minus screws which leads to a higher security for the assembly as the "star" geometry does not get destroyed so easily
- The guidance between screw-driver and screw leads to a perfect assembling of the screws especially in spring hinges which are equipped with a double action. The screw can be mounted without any additional help into spring hinges!

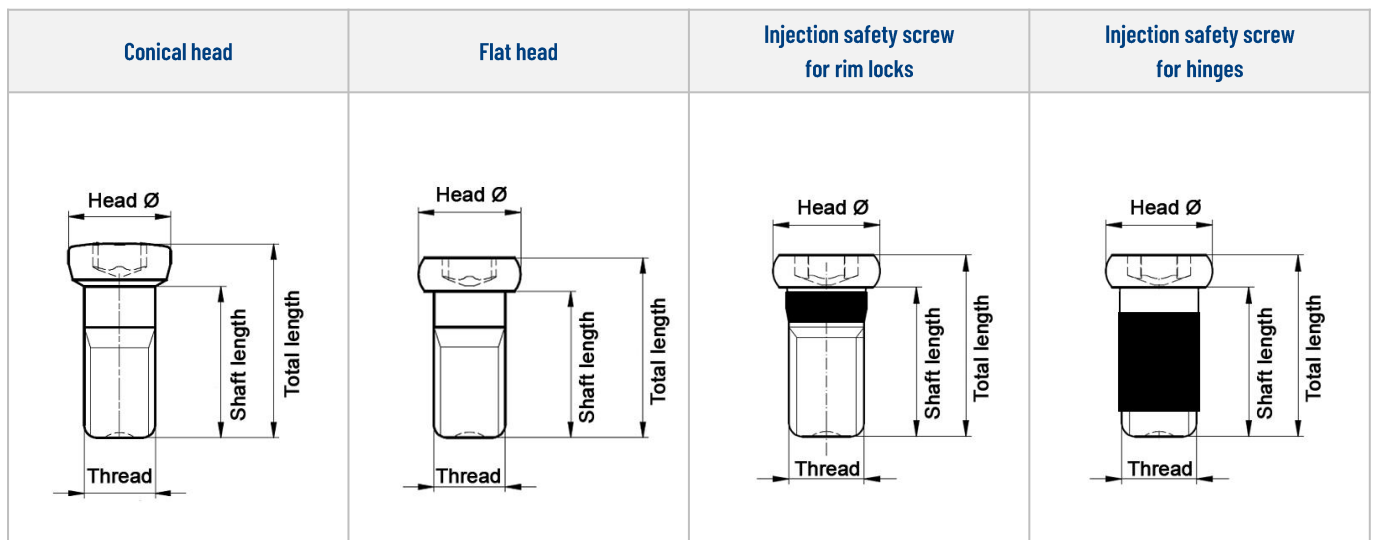

| Art. No. | Size | Thread | Total length | Shaft length | Head Ø | Screw type                           |
|----------|------|--------|--------------|--------------|--------|--------------------------------------|
| 99-04803 | T3   | M1.4   | 2.4          | 1.6          | 2.0    | Conical head screw                   |
| 99-04811 | T3   | M1.4   | 3.0          | 2.2          | 2.0    |                                      |
| 99-04812 | T3   | M1.4   | 3.3          | 2.5          | 2.0    |                                      |
| 99-04814 | T3   | M1.4   | 3.8          | 3.0          | 2.0    |                                      |
| 99-04816 | T3   | M1.4   | 4.5          | 3.7          | 2.0    |                                      |
| 99-04002 | T3   | M1.2   | 9.0          | 8.5          | 1.9    | Flat head screw for rimless frames   |
| 99-04001 | T3   | M1.2   | 13.0         | 12.4         | 2.0    |                                      |
| 99-04750 | T3   | M1.2   | 2.3          | 1.8          | 2.2    | Flat head screw                      |
| 99-04728 | T3   | M1.4   | 2.8          | 2.1          | 2.0    |                                      |
| 99-04724 | T3   | M1.4   | 3.5          | 2.8          | 2.0    |                                      |
| 99-04701 | T3   | M1.4   | 3.9          | 3.2          | 2.0    |                                      |
| 99-04730 | T3   | M1.4   | 6.0          | 5.3          | 2.0    |                                      |
| 99-04726 | T3   | M1.6   | 5.0          | 4.3          | 2.5    |                                      |
| 99-04725 | T3   | M1.6   | 5.3          | 4.5          | 2.5    |                                      |
| 99-04609 | T3   | M1.4   | 3.5          | 2.8          | 2.0    | Injection safety screw for rim locks |
| 99-04602 | T3   | M1.4   | 4.3          | 3.6          | 2.0    |                                      |
| 99-04324 | T3   | M1.4   | 3.4          | 2.7          | 2.0    | Injection safety screw for hinges    |
| 99-04327 | T3   | M1.4   | 4.5          | 3.8          | 2.0    |                                      |
| 99-04333 | T3   | M1.4   | 5.0          | 4.3          | 2.0    |                                      |

