

SMART GLASSES - NON FLEX

FLOWLINK

— FOR SMART GLASSES —

✓
PATENT
PENDING




A NEW GENERATION OF SMART HINGES


FLOWLINK

— FOR SMART GLASSES —

- Two-piece side-neutral hinge
- Built-in cable tunnel for smooth and easy routing
- Universal design for perfect integration into the frame
- Fixed to the temple with screws
- Fixed to the front with Space Screws for smooth movement
- Three standard sizes – easy adaptation of width
- Delivery status: loose

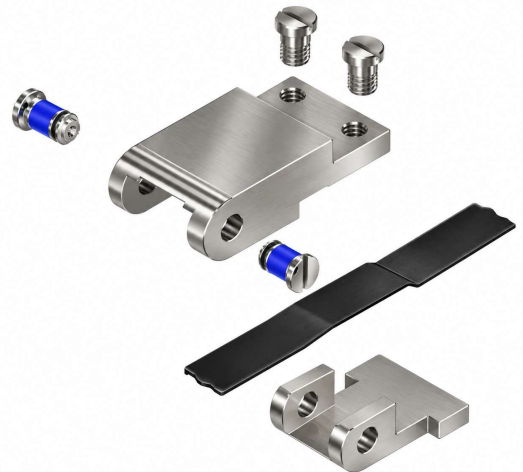

Easy assembly & disassembly

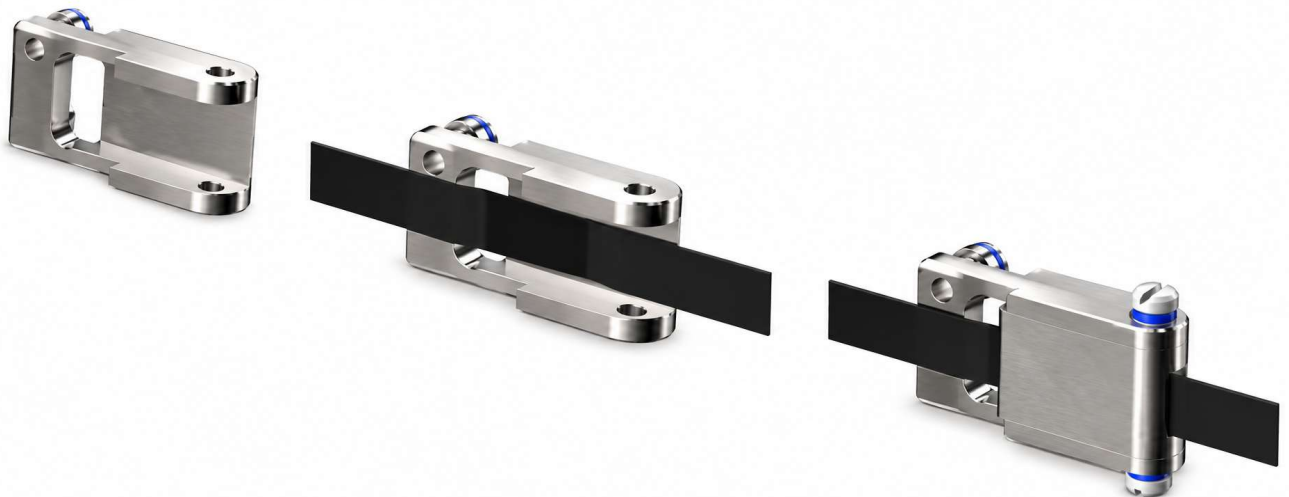

Best applications of FLOWLINK in 3D-printed & injected frames





FLOWLINK

— FOR SMART GLASSES —


7.2 mm width | up to 4 mm cable width | 2.5 g

Case: 70-42013.500.10

Cover: 70-42013.200.10

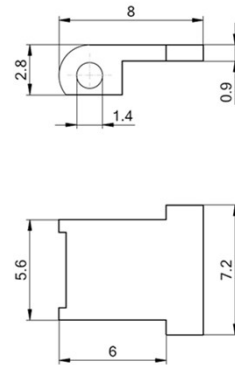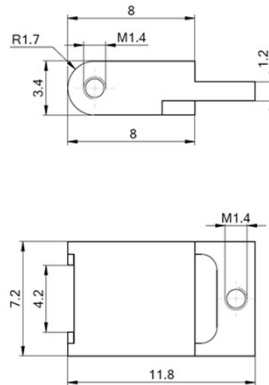

Fixation screws to the temple



Hinge screws





Space


6.0 mm width | up to 3 mm cable width | 2.4 g

Case: 70-42010.500.10

Cover: 70-42010.200.10

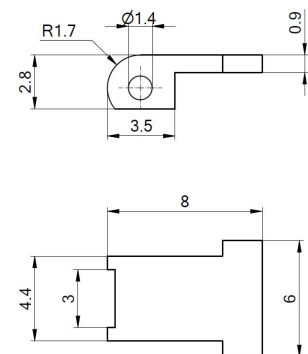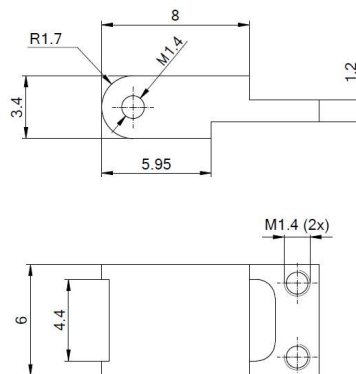

Fixation screws to the temple



Hinge screws





Space

3.0 mm width | up to 2 mm cable width | 0.85 g

Case: 70-42011.500.10


Cover: 70-42011.100.10

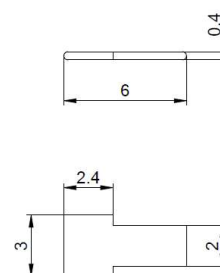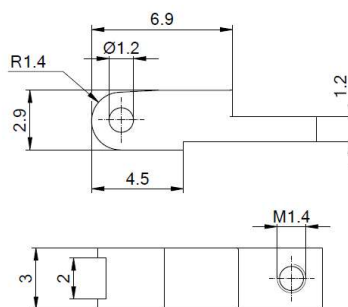

Fixation screws to the temple



Hinge screws





OBE GmbH & Co. KG · Turnstr. 22 · 75228 Ispringen · Germany
Tel. +49 7231 802-0 · www.obe.de · info@obe.de