SMART GLASSES - NON FLEX

FLOWLINK

FOR SMART GLASSES

PATENT PENDING

A NEW GENERATION OF SMART HINGES

OBE Präzision

FLOWLINK

FOR SMART GLASSES

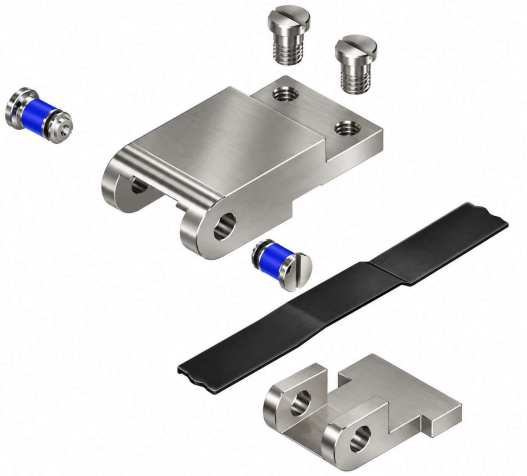

- Two-piece side-neutral hinge
- Built-in cable tunnel for smooth and easy routing
- Universal design for perfect integration into the frame
- Fixed to the temple with screws
- Fixed to the front with Space Screws for smooth movement
- Three standard sizes – easy adaptation of width
- Delivery status: loose

Easy assembly & disassembly

Best applications of FLOWLINK in 3D-printed & injected frames

FLOWLINK

FOR SMART GLASSES

7.2 mm width | up to 4.2 mm cable width | 2.5 g — Case: 70-42013.500.10 — Cover: 70-42013.200.10

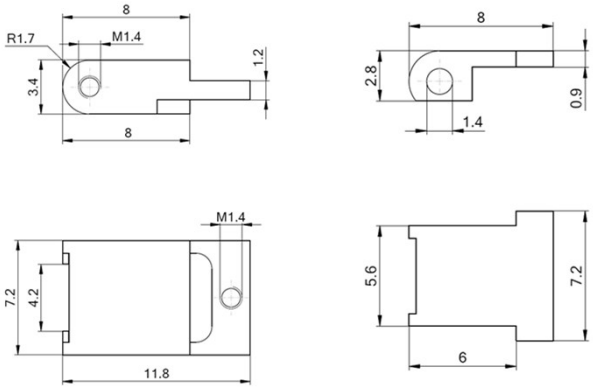

Fixation screws to the temple	Hinge screws
99-04728	99-05310.600
99-02008	99-02310.600
99-02046	99-04324.600

Space

6.0 mm width | up to 3 mm cable width | 2.4 g — Case: 70-42010.500.10 — Cover: 70-42010.200.10

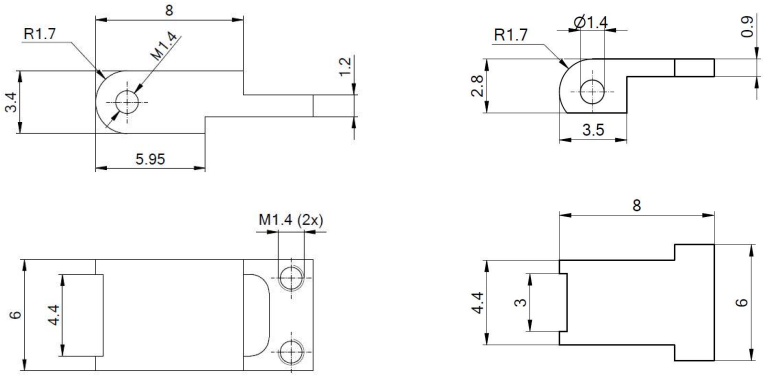

Fixation screws to the temple	Hinge screws
99-04728	99-05310.600
99-02008	99-02310.600
99-02046	99-04324.600

Space

3.0 mm width | up to 2 mm cable width | 0.85 g — Case: 70-42011.500.10 — Cover: 70-42011.100.10

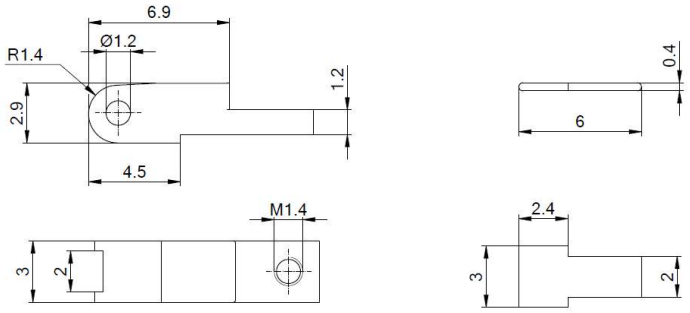

Fixation screws to the temple	Hinge screws
99-04728	99-02911
99-02046	99-02904

OBE GmbH & Co. KG · Turnstr. 22 · 75228 Ispringen · Germany
Tel. +49 7231 802-0 · www.obe.de · info@obe.de

09-2026