

ACETATE & COMBINATION FRAMES → FULLY HIDDEN FLEX

Caché

WITH FLEXUNO




Invisible flex – Visible comfort









73-07050

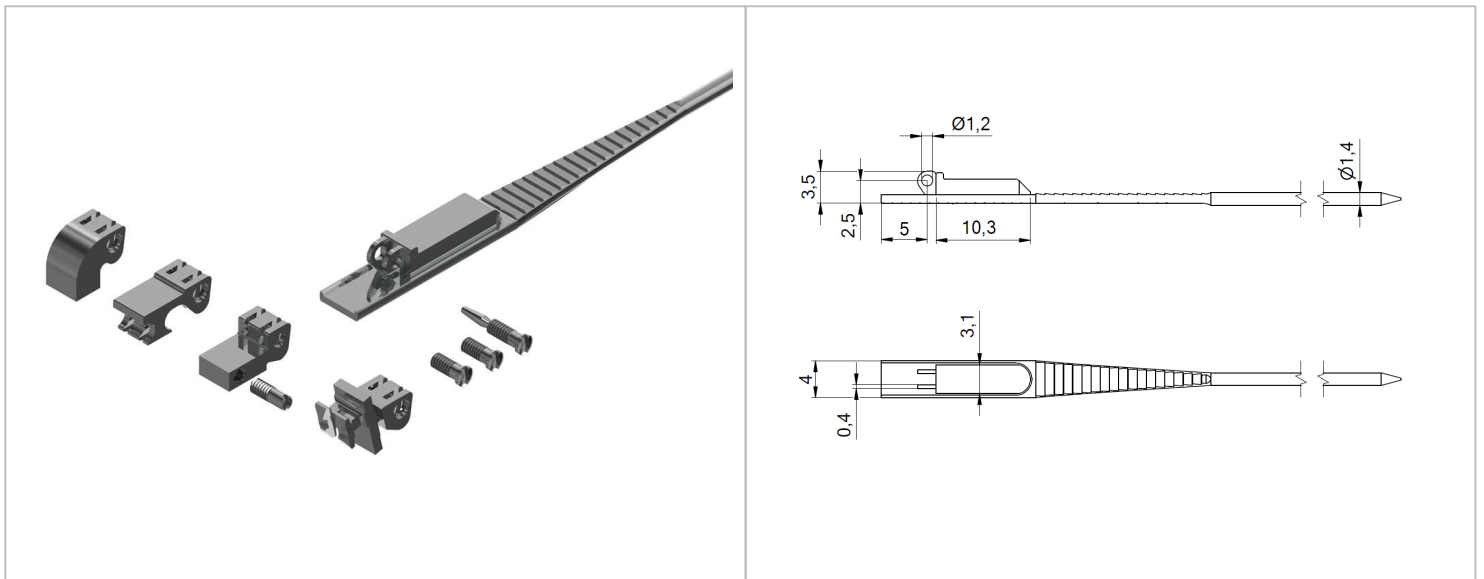- Total hidden spring hinge on wire for full acetate frames
- Special designed wire in nickel silver with soldered low case
- Easy standard shooting processing possible
- Zero rocking with pre-assembled flexUno mechanism made from stainless steel
- Exchangeable mechanism in case of damage
- More hidden look with block front hinge to be assembled with screw
- 75% of recycled nickel silver chips are used in the production of new cases




Matching parts

Front hinges	Art. No.	Hinge fixation	Fixation to front
Front hinges for plastic frames 90° 	33-04027	99-02030 	inserting
Front hinges for plastic frames 180° 	33-04028	99-02032 self aligning 	inserting
Step hinges 	52-07050	99-02027.800 self aligning for break off 	soldering
Three barrel block hinges 	32-04077	99-02028 	screwing with 99-01752  


Caché is strong...

Thanks to the mechanism made from stainless steel and based on the flexUno construction.

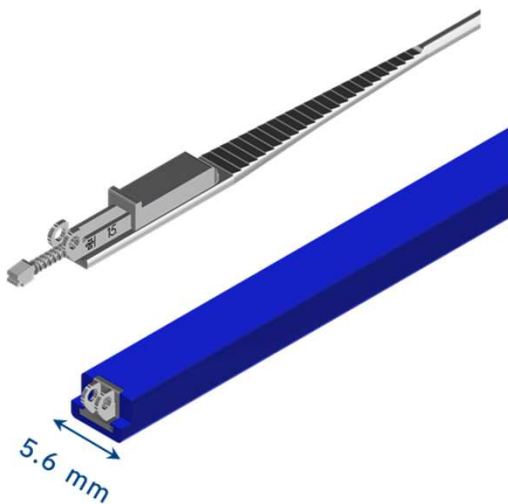

Caché is highly performant...

Thanks to the small metal support – a recognition part for this spring hinge – the flex functionality is perfect as the contact with the plastic during the hinge movement is avoided.

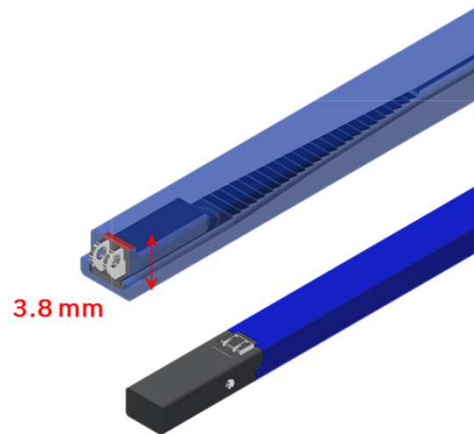

Caché is slim...

Thanks to the slim construction a minimal temple width including the plastic material can be achieved. The minimum temple width with plastic is only 5.6 mm.


Caché is invisible...

Thanks to the low construction the spring hinge can be completely covered in 4 mm acetate sheets.

Replacement of mechanism


DISASSEMBLING:

Insert a MINUS screw driver into the slit. Push up and unlock mechanism. Remove the side hinge and take out the spring.

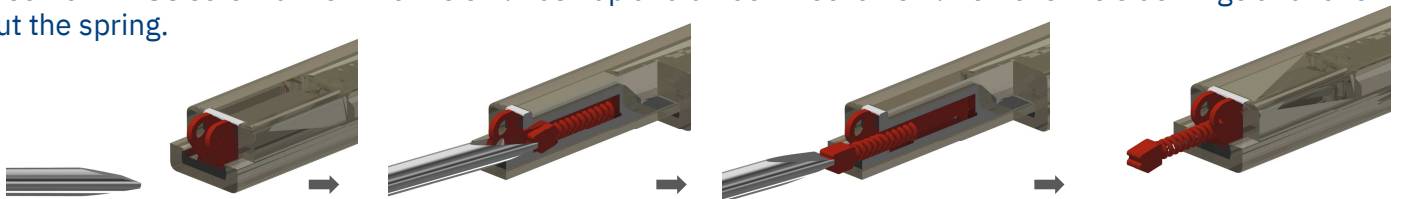

REASSEMBLING:

Take new mechanism. Insert locking device with slit down. Push the mechanism with Minus screw driver until it clicks. Only after clicking the mechanism is inserted!

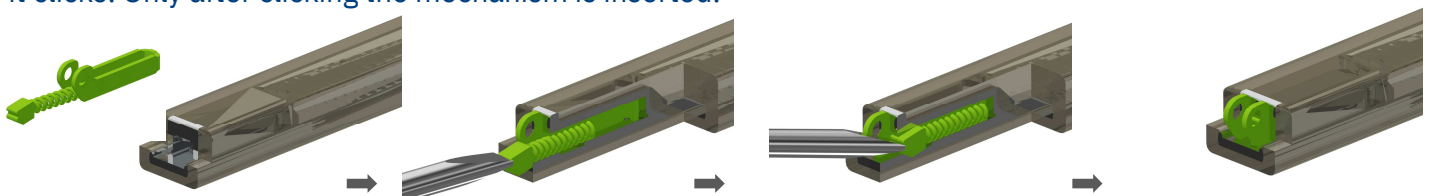



OBE GmbH & Co. KG · Turnstr. 22 · 75228 Ispringen · Germany
Tel. +49 7231 802-0 · www.obe.de · info@obe.de