

INJECTION & 3D PRINTED FRAMES → NON FLEX

EasyLink

WITH SPACE SCREWS




Bridging design and function with precision

EasyLink

WITH SPACE SCREWS

- Dual function hinge in stainless steel combining temple and front hinge in one unit
- Smooth movement with Space Screw technology integrated
- 3 widths available – widest version can be laser engraved

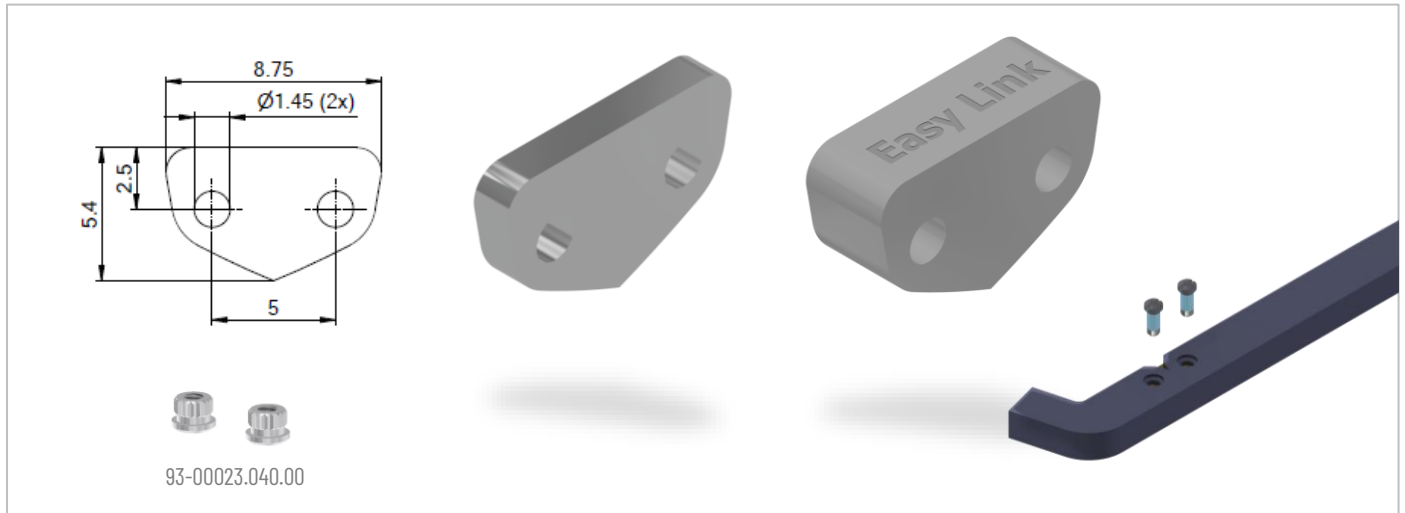

52-40012.000.X0	52-40010.000.X0	52-40013.000.X0
Barrel 0.6 mm	Barrel 1.3 mm	Barrel 3.0 mm

Depending on the thickness of the temple the following Space Screws are available

Art.no.	Art.no.	Total length	Shaft length	Head Ø
99-02325.600.00	99-05325.600.00	4.0	3.3	2.0
99-02301.600.00	99-05301.600.00	4.3	3.6	2.0
99-02327.600.00	99-05327.600.00	4.5	3.8	2.0
99-02379.600.00	99-05379.600.00	4.6	3.9	2.0
99-02333.600.00	99-05333.600.00	5.0	4.3	2.0
99-02334.600.00	99-05334.600.00	5.5	4.8	2.0
	99-05331.600.00	5.7	4.9	2.5
99-02374.600.00		5.8	5.1	2.0
99-02356.600.00		6.1	5.4	2.0
99-02332.600.00	99-05332.600.00	6.4	5.7	2.0
99-02376.600.00		6.9	6.2	2.0
99-02375.600.00		7.5	6.8	2.0
99-02380.600.00	99-05380.600.00	8.5	7.8	2.0
	99-05308.600.00	9.2	8.5	2.0



OBE GmbH & Co. KG · Turnstr. 22 · 75228 Ispringen · Germany
Tel. +49 7231 802-0 · www.obe.de · info@obe.de