



FLEXUNO INTEGRATED STAINLESS STEEL - 2x0.4 mm



- Two-barrel spring mechanism in stainless steel
- Recommended temple width 3.2 – 8.0 mm
- Zero rocking & easy adjustment with flexUno technology



patented



patented

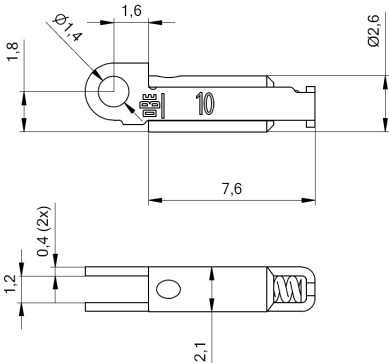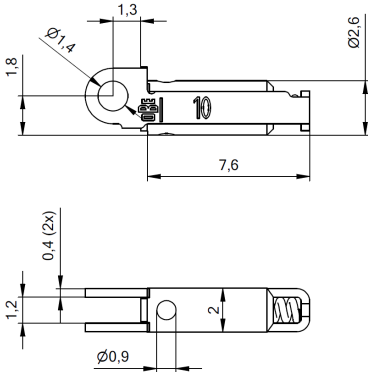60-44063.200	fixation by peening	standard spring	60-44063.855	fixation with pin or screw-in	strong spring
60-44063.205		strong spring			
					

Matching parts

Front hinges for soldering	Front hinges for welding	Front hinges for plastic frames 90°	Front hinges for plastic frames 180°	Step hinges for soldering	Screws
52-05067	52-04063	33-05363 33-04163 33-04067 off center 0°/6° inclination	33-04063	52-05363 52-05463	99-01814 99-02524 99-04814