



FLEXINO SOLO-TI TITANIUM - 0.6 mm

- One-barrel spring mechanism with integrated anti-friction washer
- Gold plating protection for titanium temples against aggressive acids
- Recommended temple width 1.9 - 2.6 mm

60-44015.8XX

fixation by peening





patented

FLEXINO SOLO-TI TITANIUM - 0.9 mm

- One-barrel spring mechanism with integrated anti-friction washer
- Gold plating protection for titanium temples against aggressive acids
- Recommended temple width 2.1 - 3.5 mm

60-44022.8XX

fixation by peening

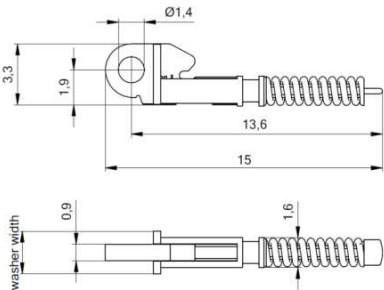

patented

Different washer widths available according to temple width (mm)

2.00, 2.20, 2.40, 2.60, 3.00, 3.60, 3.40