

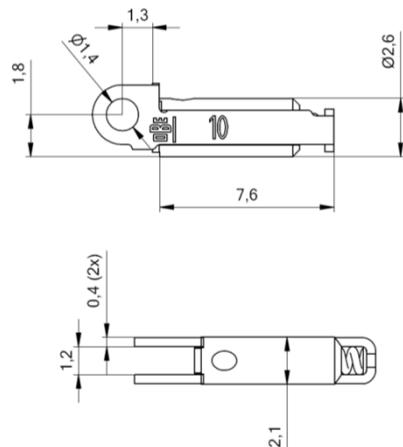
FLEXUNO INTEGRATED-TI TITANIUM - 2x 0.4 mm

- Two-barrel spring mechanism with integrated anti-friction washer
- Gold plating protection for titanium temples against aggressive acids
- Zero rocking & easy adjustment with flexUno technology
- Recommended temple width 3.2 – 8.0 mm






patented

60-44063.820	fixation by peening	standard spring
60-44063.825		strong spring



Matching parts

Front hinges for soldering and laser welding	Front hinges for welding	Screws
		
52-25065 titanium	52-24063 titanium	99-01814 99-02524 99-04814