

SPECIAL SCREWS AND ACCESSORIES → SAFETY SCREWS FOR RIM LOCKS

Safety Screws

FOR RIM LOCKS



Safety Screws

FOR RIM LOCKS


ISS injection safety screws for rim locks

When tightening the screw the resilient plastic material "peek" is slightly compressed.

This provides:

- Stainless steel screws with integrated safety system
- Main application for rim locks in metal frames
- Eliminate the risk of losing lenses by keeping them in position

These functions remain unchanged, even if the screw is disassembled multiple times.




Minus screw

OBE No.	Thread	Total length	Shaft length	Head Ø
99-01546	M1.2	3.1	2.3	1.6
99-01548	M1.2	3.6	2.8	1.6
99-01549	M1.2	4.1	3.3	1.6
99-01550	M1.2	4.5	3.7	1.6
99-01551	M1.2	5.0	4.2	1.6
99-01538	M1.4	2.6	1.8	1.8
99-01544	M1.4	2.7	2.1	2.0
99-01542	M1.4	2.8	2.0	1.8
99-01514	M1.4	2.9	2.3	2.0
99-01541	M1.4	3.1	2.3	1.8
99-01560	M1.4	3.2	2.6	2.0
99-01539	M1.4	3.4	2.6	1.8
99-01543	M1.4	3.5	2.7	1.8
99-01555	M1.4	3.6	2.9	2.0
99-01584	M1.4	3.6	2.9	2.0
99-01520	M1.4	3.7	3.1	2.0
99-01537	M1.4	3.9	3.1	1.8
99-01545	M1.4	4.0	3.2	1.8
99-01585	M1.4	4.0	3.2	2.0
99-01515	M1.4	4.0	3.4	2.0
99-01540	M1.4	4.4	3.6	1.8
99-01547	M1.4	5.0	4.2	1.8

Plus-minus screw

OBE No.	Thread	Total length	Shaft length	Head Ø
99-01624	M1.2	3.2	2.6	1.8
99-01627	M1.2	4.4	3.8	1.8
99-01690	M1.4	2.4	1.8	2.0
99-01610	M1.4	2.7	2.1	2.0
99-01606	M1.4	3.0	2.4	2.0
99-01644	M1.4	3.2	2.6	1.8
99-01604	M1.4	3.2	2.6	2.0
99-01609	M1.4	3.4	2.8	2.0
99-01603	M1.4	3.6	3.0	2.0
99-01601	M1.4	3.8	3.2	2.0
99-01608	M1.4	4.0	3.4	2.0
99-01602	M1.4	4.2	3.6	2.0
99-01607	M1.4	4.6	4.0	2.0
99-01605	M1.4	5.0	4.4	2.0
99-01600	M1.4	5.9	5.3	2.0
99-01612	M1.4	6.4	5.8	2.0

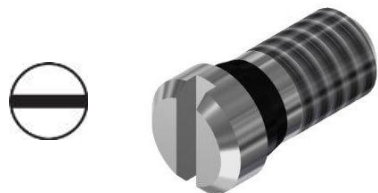

90% of the recycled plastic sprues are used for injection of new safety screws



OBE GmbH & Co. KG · Turnstr. 22 · 75228 Ispringen · Germany
Tel. +49 7231 802-0 · www.obe.de · info@obe.de