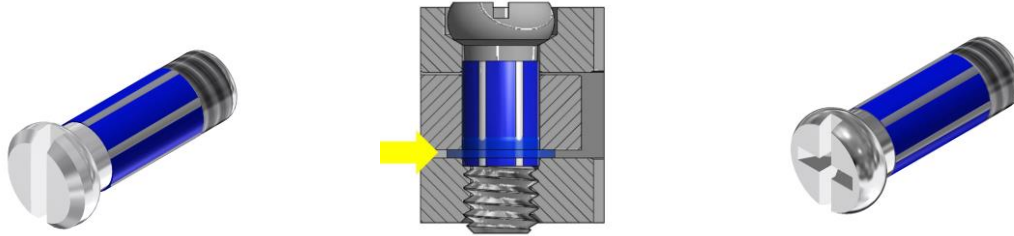
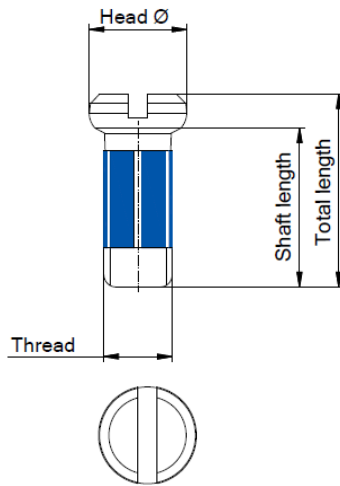
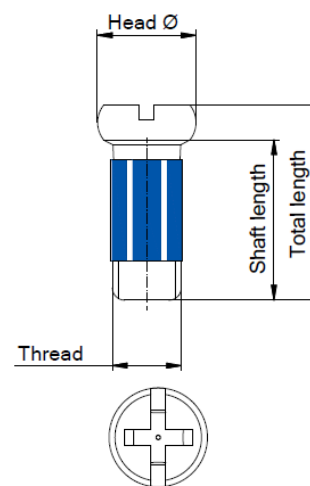


Features

- Stainless steel screws with six bumpers for optimum articulation against floppy temples
- Main application: **non flex metal & plastic temples**
- Additional anti-loosening function integrated
- Extra tolerance compensation
- No backlash
- 90% of the recycled plastic sprues are used for injection of new Space Screws


patented
Minus head

Plus-minus head

Minus head
Plus-minus head

Minus head					Plus-minus head				
Art. No.	Thread	Total length	Shaft length	Head Ø	Art. No.	Thread	Total length	Shaft length	Head Ø
99-05305.600	M1.4	2.8	2.2	1.8	99-02305.600	M1.4	2.8	2.2	1.8
99-05310.600	M1.4	3.0	2.4	2.0	99-02310.600	M1.4	3.0	2.4	2.0
99-05322.600	M1.4	3.2	2.6	2.0	99-02322.600	M1.4	3.2	2.6	2.0
99-05311.600	M1.4	3.3	2.7	1.8	99-02324.600	M1.4	3.4	2.7	2.0
99-05324.600	M1.4	3.4	2.7	2.0	99-02328.600	M1.4	3.5	2.8	2.5
99-05328.600	M1.4	3.5	2.8	2.5	99-02393.600	M1.4	3.6	3.0	2.0
99-05325.600	M1.4	4.0	3.3	2.0	99-02325.600	M1.4	4.0	3.3	2.0
99-05301.600	M1.4	4.3	3.6	2.0	99-02301.600	M1.4	4.3	3.6	2.0
99-05327.600	M1.4	4.5	3.8	2.0	99-02327.600	M1.4	4.5	3.8	2.0
99-05379.600	M1.4	4.6	3.9	2.0	99-02379.600	M1.4	4.6	3.9	2.0
99-05333.600	M1.4	5.0	4.3	2.0	99-02333.600	M1.4	5.0	4.3	2.0
99-05334.600	M1.4	5.5	4.8	2.0	99-02334.600	M1.4	5.5	4.8	2.0
99-05331.600	M1.4	5.7	4.9	2.5	99-02374.600	M1.4	5.8	5.1	2.0
99-05332.600	M1.4	6.4	5.7	2.0	99-02356.600	M1.4	6.1	5.4	2.0
99-05380.600	M1.4	8.5	7.8	2.0	99-02332.600	M1.4	6.4	5.7	2.0
99-05308.600	M1.4	9.2	8.5	2.0	99-02376.600	M1.4	6.9	6.2	2.0
					99-02380.600	M1.4	8.5	7.8	2.0