


## SPACE SCREWS FOR HINGES

- Stainless steel screws equipped with injected plastic for smooth movement & against loosening
- Main application in non-flex metal & plastic templates
- System possible to use up to 7-barrel hinges
- Torx® system upon request




MOVIE




patented

Minus head

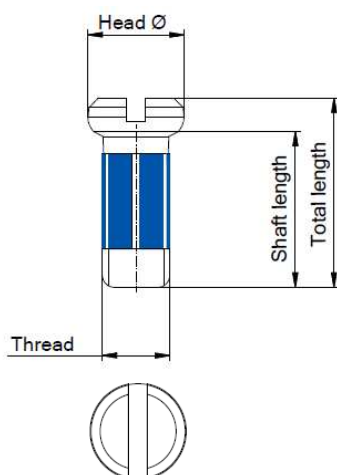

Plus-minus head

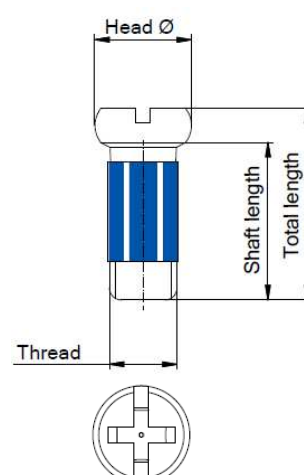

Minus head

Plus-minus head

| Art. No.     | Thread | Total length | Shaft length | Head Ø |
|--------------|--------|--------------|--------------|--------|
| 99-05305.600 | M1.4   | 2.8          | 2.2          | 1.8    |
| 99-05310.600 | M1.4   | 3.0          | 2.4          | 2.0    |
| 99-05322.600 | M1.4   | 3.2          | 2.6          | 2.0    |
| 99-05311.600 | M1.4   | 3.3          | 2.7          | 1.8    |
| 99-05324.600 | M1.4   | 3.4          | 2.7          | 2.0    |
| 99-05328.600 | M1.4   | 3.5          | 2.8          | 2.5    |
| 99-05323.600 | M1.6   | 3.5          | 2.8          | 2.5    |
| 99-05397.600 | M1.4   | 3.8          | 3.1          | 2.0    |
| 99-05325.600 | M1.4   | 4.0          | 3.3          | 2.0    |
| 99-05301.600 | M1.4   | 4.3          | 3.6          | 2.0    |
| 99-05327.600 | M1.4   | 4.5          | 3.8          | 2.0    |
| 99-05379.600 | M1.4   | 4.6          | 3.9          | 2.0    |
| 99-05333.600 | M1.4   | 5.0          | 4.3          | 2.0    |
| 99-05334.600 | M1.4   | 5.5          | 4.8          | 2.0    |
| 99-05331.600 | M1.4   | 5.7          | 4.9          | 2.5    |
| 99-05332.600 | M1.4   | 6.4          | 5.7          | 2.0    |
| 99-05375.600 | M1.4   | 7.5          | 6.8          | 2.0    |
| 99-05380.600 | M1.4   | 8.5          | 7.8          | 2.0    |
| 99-05308.600 | M1.4   | 9.2          | 8.5          | 2.0    |

| Art. No.     | Thread | Total length | Shaft length | Head Ø |
|--------------|--------|--------------|--------------|--------|
| 99-02305.600 | M1.4   | 2.8          | 2.2          | 1.8    |
| 99-02310.600 | M1.4   | 3.0          | 2.4          | 2.0    |
| 99-02322.600 | M1.4   | 3.2          | 2.6          | 2.0    |
| 99-02324.600 | M1.4   | 3.4          | 2.7          | 2.0    |
| 99-02328.600 | M1.4   | 3.5          | 2.8          | 2.5    |
| 99-02393.600 | M1.4   | 3.6          | 3.0          | 2.0    |
| 99-02397.600 | M1.4   | 3.8          | 3.1          | 2.0    |
| 99-02325.600 | M1.4   | 4.0          | 3.3          | 2.0    |
| 99-02301.600 | M1.4   | 4.3          | 3.6          | 2.0    |
| 99-02327.600 | M1.4   | 4.5          | 3.8          | 2.0    |
| 99-02379.600 | M1.4   | 4.6          | 3.9          | 2.0    |
| 99-02333.600 | M1.4   | 5.0          | 4.3          | 2.0    |
| 99-02334.600 | M1.4   | 5.5          | 4.8          | 2.0    |
| 99-02374.600 | M1.4   | 5.8          | 5.1          | 2.0    |
| 99-02356.600 | M1.4   | 6.1          | 5.4          | 2.0    |
| 99-02332.600 | M1.4   | 6.4          | 5.7          | 2.0    |
| 99-02376.600 | M1.4   | 6.9          | 6.2          | 2.0    |
| 99-02375.600 | M1.4   | 7.5          | 6.8          | 2.0    |
| 99-02380.600 | M1.4   | 8.5          | 7.8          | 2.0    |