SPACE SCREWS FOR HINGES

- Stainless steel screws equipped with injected plastic for smooth movement & against loosening
- Main application in non-flex metal & plastic temples
- System possible to use up to 7-barrel hinges
- Torx® system upon request

MOVIE





patented

Minus head

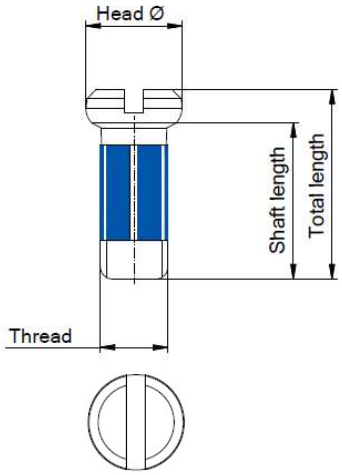

Plus-minus head

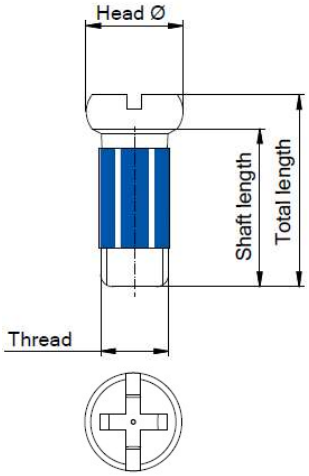

Minus head				
Art. No.	Thread	Total length	Shaft length	Head Ø
99-05305.600	M1.4	2.8	2.2	1.8
99-05310.600	M1.4	3.0	2.4	2.0
99-05322.600	M1.4	3.2	2.6	2.0
99-05311.600	M1.4	3.3	2.7	1.8
99-05324.600	M1.4	3.4	2.7	2.0
99-05328.600	M1.4	3.5	2.8	2.5
99-05397.600	M1.4	3.8	3.1	2.0
99-05325.600	M1.4	4.0	3.3	2.0
99-05301.600	M1.4	4.3	3.6	2.0
99-05327.600	M1.4	4.5	3.8	2.0
99-05379.600	M1.4	4.6	3.9	2.0
99-05333.600	M1.4	5.0	4.3	2.0
99-05334.600	M1.4	5.5	4.8	2.0
99-05331.600	M1.4	5.7	4.9	2.5
99-05332.600	M1.4	6.4	5.7	2.0
99-05375.600	M1.4	7,5	6.8	2.0
99-05380.600	M1.4	8.5	7.8	2.0
99-05308.600	M1.4	9.2	8.5	2.0

Plus-minus head				
Art. No.	Thread	Total length	Shaft length	Head Ø
99-02305.600	M1.4	2.8	2.2	1.8
99-02310.600	M1.4	3.0	2.4	2.0
99-02322.600	M1.4	3.2	2.6	2.0
99-02324.600	M1.4	3.4	2.7	2.0
99-02328.600	M1.4	3.5	2.8	2.5
99-02393.600	M1.4	3.6	3.0	2.0
99-02397.600	M1.4	3.8	3.1	2.0
99-02325.600	M1.4	4.0	3.3	2.0
99-02301.600	M1.4	4.3	3.6	2.0
99-02327.600	M1.4	4.5	3.8	2.0
99-02379.600	M1.4	4.6	3.9	2.0
99-02333.600	M1.4	5.0	4.3	2.0
99-02334.600	M1.4	5.5	4.8	2.0
99-02374.600	M1.4	5.8	5.1	2.0
99-02356.600	M1.4	6.1	5.4	2.0
99-02332.600	M1.4	6.4	5.7	2.0
99-02376.600	M1.4	6.9	6.2	2.0
99-02375.600	M1.4	7,5	6.8	2.0
99-02380.600	M1.4	8.5	7.8	2.0

Catalogue 2026 | 2027 - Subject to change without prior notice – all measurements in mm